


QS1-260-2100 Quasi-Optical Source

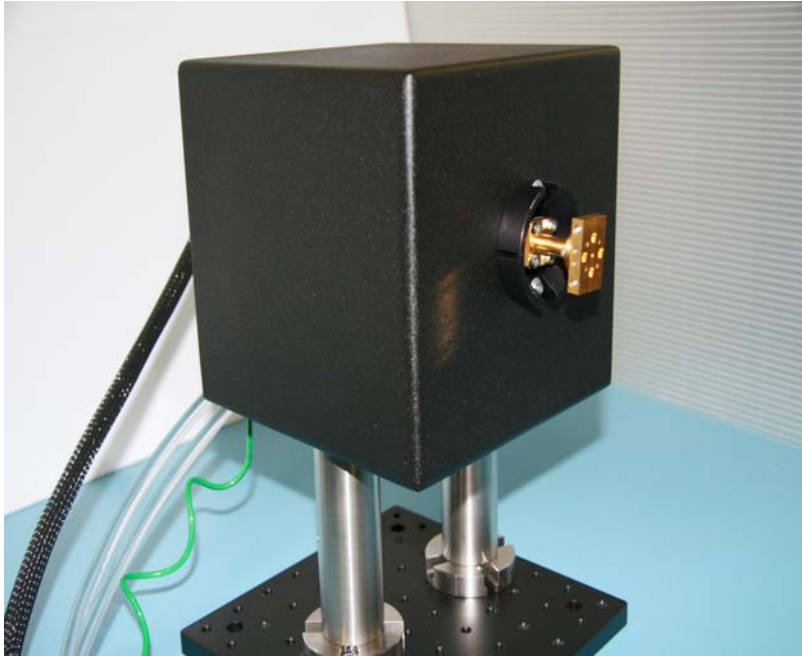

Frequency Range	Power Range
155-260 GHz	Up to 100 mW
310-520 GHz	Up to 3 mW
550-750 GHz	Up to 1 mW
1.0-1.55 THz	Up to 25 μ W
1.7-2.1 THz	Up to 5 μ W

The QS1-260-2100 is a quasi-optical source, tunable across 160-260 GHz, 310-520 GHz, 550-750 GHz, 1.0-1.55 THz and 1.7-2.1 THz frequency ranges. The unit is rapidly configurable for any of those ranges. This makes it an excellent choice for a broad range of research and industrial applications.

The QS1-260-2100 is a hybrid device composed of a QS1-260 (OV-24) backward wave oscillator (BWO), waveguide adapter and a set of four Schottky diode frequency multipliers. In the baseline configuration, QS1-260 produces up to 100 mW of continuous wave tunable monochromatic power with a bandwidth of 2 MHz.

The Schottky diodes attach easily to the wave guide adapter for quick spectral range changes. Typical spectra of QS1-260-TT are shown on the next page.

The QS1-260 BWO can either be pre-packaged into MS-0.6 magnetic systems or used with any other MS-X.X system offered by Microtech Instruments Inc. Operation of QS1-260 also requires a high voltage power supply such as VR-6M and a water cooling system.

